


POLÍN

SE MANEJA EN ACERO COMERCIAL

PERFIL	DIMENSIONES	Kg./m	LARGO (m)
3 Cal 14	3" x 1 1/2"	2.40	6
4 Cal 14	4" x 2"	3.18	6
5 Cal 14	5" x 2"	3.55	6
6 Cal 14	6" x 2"	3.92	6
6 Cal 12	6" x 2"	5.58	6
8 Cal 14	8" x 2 3/4"	5.19	8
8 Cal 12	8" x 2 3/4"	7.39	8
8 Cal 10	8" x 2 3/4"	9.46	8
10 Cal 14	10" x 2 3/4"	5.98	10
10 Cal 12	10" x 2 3/4"	8.46	10
10 Cal 10	10" x 2 3/4"	10.83	10
12 Cal 14	12" x 3 1/2"	7.57	12
12 Cal 12	12" x 3 1/2"	10.55	12
12 Cal 10	12" x 3 1/2"	13.50	12



POLIN DE 3" A 15" EN ACERO COMERCIAL Y DE ALTA RESISTENCIA

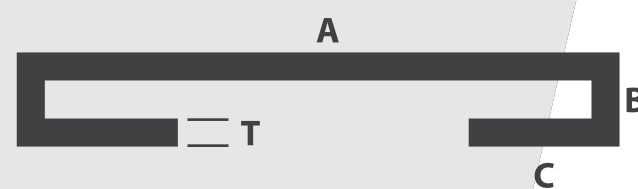

A = PERALTE
B = PATÍN
C = CEJA
T = ESPESOR

PERFIL	ESPESOR	PERALTE	PATÍN	CEJA	PESO	PZAS. X PAQ.
15MT14	0,075	15"	3.5"	0.875"	8,8 kg.	16
15MT12	0,104	15"	3.5"	0.875"	12,3 kg.	16
15MT10	0,134	15"	3.5"	0.875"	15,8 kg.	16
12MT14	0,075	12"	12"	0.875"	7,4 kg.	24
12MT12	0,104	12"	3.5"	0.875"	10,4 kg.	24
12MT10	0,134	12"	3.5"	0.875"	13,4 kg.	24
10MT14	0,075	10"	3.5"	0.875"	6,6 kg.	24
10MT12	0,104	10"	3.5"	0.875"	9,3 kg.	24
10MT10	0,134	10"	3.5"	0.875"	12 kg.	24
8MT14	0,075	8"	3.5"	0.875"	5,9 kg.	48
8MT12	0,104	8"	3.5"	0.875"	8,2 kg.	48
8MT10	0,134	8"	3.5"	0.875"	10,6 kg.	48
6MT14	0,075	6"	2.5"	0.750"	4,3 kg.	80
6MT12	0,104	6"	2.5"	0.750"	6,1 kg.	80
6MT16	0,059	6"	2.0"	0.750"	3,3 kg.	100
6MT14	0,075	6"	2.0"	0.750"	4,2 kg.	100
6MT12	0,104	6"	2.0"	0.750"	5,7 kg.	100
5MT16	0,059	5"	2.0"	0.750"	3,1 kg.	100
5MT14	0,075	5"	2.0"	0.750"	3,8 kg.	100
5MT12	0,104	5"	2.0"	0.750"	5,2 kg.	100
4MT16	0,059	4"	2.0"	0.750"	2,7 kg.	100
4MT14	0,075	4"	2.0"	0.750"	3,3 kg.	100
4MT12	0,104	4"	2.0"	0.750"	4,5 kg.	100
3MT16	0,059	3"	1.5"	0.750"	2 kg.	100
3MT14	0,075	3"	1.5"	0.750"	2,5 kg.	100
3MT12	0,104	3"	1.5"	0.750"	3,4 kg.	100

